



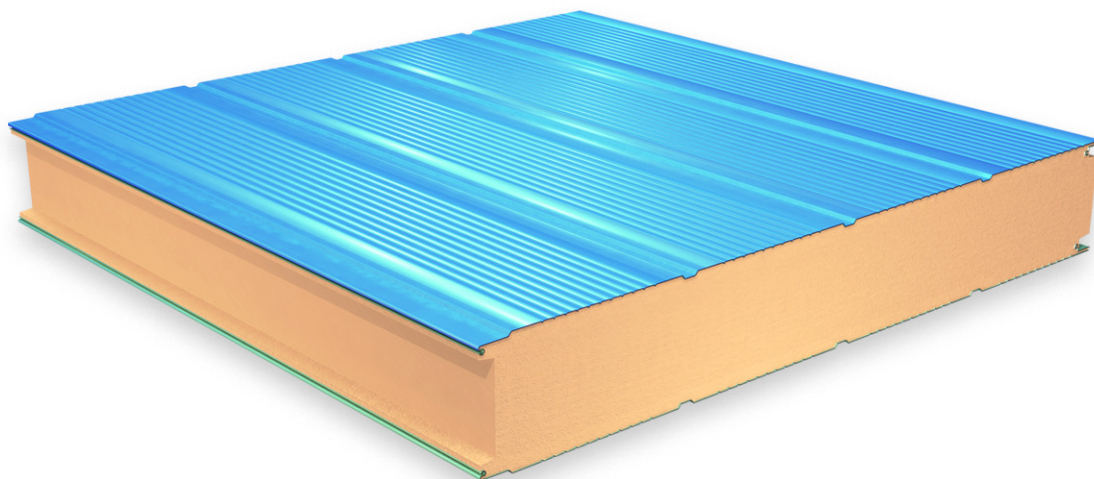

TYPE
TPG/C-LAB

S
Thickness mm.
150-180

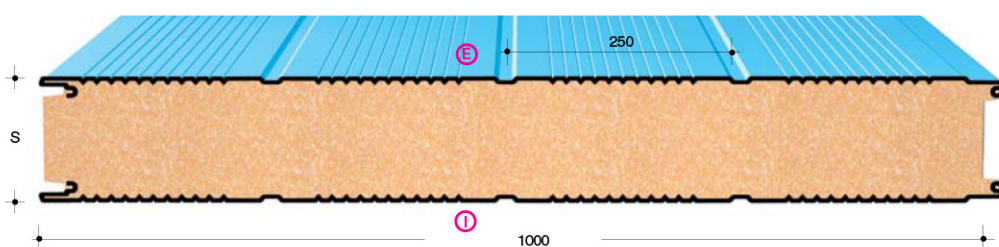

OPTION
PIR B-s2,d0

Technical characteristics and performances:

Supports: **STEEL** - S 250 GD according UNI EN 10346 norm, mechanical characteristics as D.M. of 14/01/2008 and tolerances according UNI EN 10143 norm

ALUMINIUM - UNI EN 1396 with minimum yielding limit 150 Mpa


COPPER - UNI EN 1172

COR-TEN

STAINLESS STEEL - According UNI EN 10088-1 norm

Insulation: PUR Density ~ 40 Kg/m³ UNI EN 13165 - PIR UNI EN 13501-1

Standard panel: Width mm. 1000

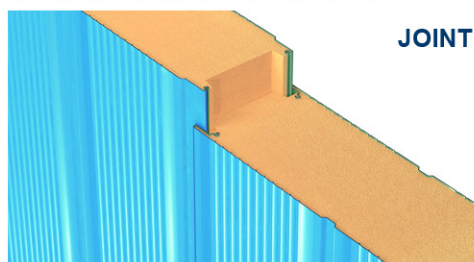

JOINT